



- Very low glare architectural circular downlight, 25 degree tilt
- 7/10 or 13 WATT, 2700/3000 or 4000k CRI80/CRI93
- Higher CRI up to 98, 7 or 10w version option
- Bezel white or black, other colours or finishes available
- Matt black dark light reflector, minimise glare
- IP54 honey comb grill to reduce direct glare option
- 15/24/or 40° reflector
- Tridonic LED engine and driver system
- Die-cast heat sink
- Short circuit, overload and temperature protection
- Life >60,000h L70/F10
- Operating ambient temperature: -25°C to +35°C
- Can be connected to 220 DC central battery
- Conforms to BS EN60598

Options


- 3 hour emergency versions
- Self test, or DALI,
- Dimming options, phase/mains DIM, DALI, DSI Switch DIM, 1-10V
- Trimless
- Honey comb baffle
- Chrome or gold reflector

AGX SPECIFICATION

Cat Number	Watts	lumens	CRI	Colour Temp (K)
AGX12927	13	790	93	2700
AGX12930	13	830	93	3000
AGX12940	13	890	90	4000
AGX12830	13	930	80	3000
AGX12849	13	980	80	4000

NW: 0.3Kg

83mm 5-25mm

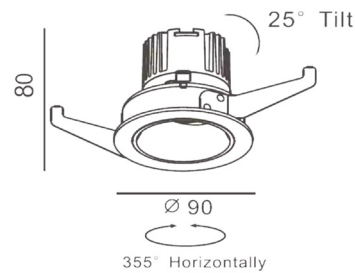

Add suffix to catalogue number:

- PD:** Phase dimming. **SD:** Dimming with push to make switch.
- DALI:** Digital Addressable Lighting Interface. **EM3:** 3 hour emergency.
- EM3ST:** 3 hour self test emergency. **EM3DALI:** DALI addressable emergency.
- HC:** Honey comb. **TL:** Trimless.

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.