



- Centro SR with drop down halo ring, available with direct or direct-indirect illumination
- Single rolled segment with single formed matt opal optic ring
- Ring is uniformly illuminated, no bright spots or dark spots
- 2 sizes Ø 700 mm Ø 1330mm
- 700 mm versions available in polished chrome, satin chrome, brass or gold
- Opal diffuser made of frosted methacrylate ensures enhanced light transmission and perfect uniform illumination
- 3000K and 4000K. On request 2700K, 3500K, 5000K, 6500K, RGBW and tunable MacAdam 3 step binning colour

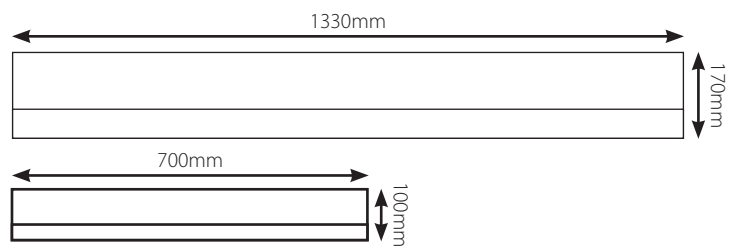

Options

- Integral emergency DSI, Dali Dimmable

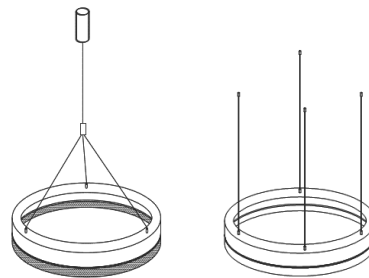

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.



CENTROSR SPECIFICATION

CAT No	Ø	Watts	Lumens
CENT45	700	45	2900
CENT100	700	100	6400
CENT120	1330	120	7680
CENT250	1330	250	16000

