




The X-TSL, a high output LED twin spot providing a long lasting solution to emergency lighting in high and large areas.

- Comprising of a white finished steel enclosure
- Fitted with twin high output LED flood lights
- Suitable for use on escape routes
- Three 20mm knockouts are available on the top and sides of the unit offering flexibility of cabling
- Unique battery retaining compartment means the X-TS Light can be used in any orientation, even upside down, to suit application
- Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005
- Non-maintained as standard, maintained and delaytimer versions available
- High output LED light source
- Adjustable heads
- Low maintenance costs
- 3 hour standby operation
- Multiple mounting orientations
- Suitable for incorporation into an emergency lighting system complying with BS5266-1:2011

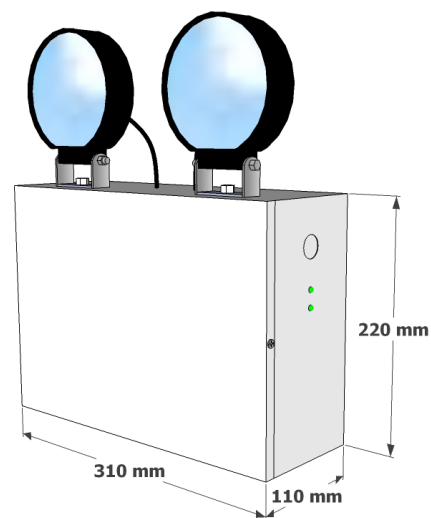

CAT No	Lamp	Weight	Output
X-TSL3NM	3 Hours	8.1 Kg	1456 Lumens

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.