




- The LPS EXIT is a decorative suspended exit sign available with arrow down self-extinguishing legend panel as standard
- The LPS EXIT complies with requirements of EN60598-2-22 and is suitable for incorporation into an emergency lighting system complying with BS5266-1:2005
- The LPS can be fitted with legends complying with the Health and safety signs directive of 2006, whilst for extensions a full range of BS5499 remain available
- LPS EXIT can be powder coated to any BS RAL finish on request, chrome and brass finishes are also available
- Conforms to EN60598-2-22 BS5266-1:2005

Cat. No.	Duration	Output (E)
LPS8	3H	100 Lumens

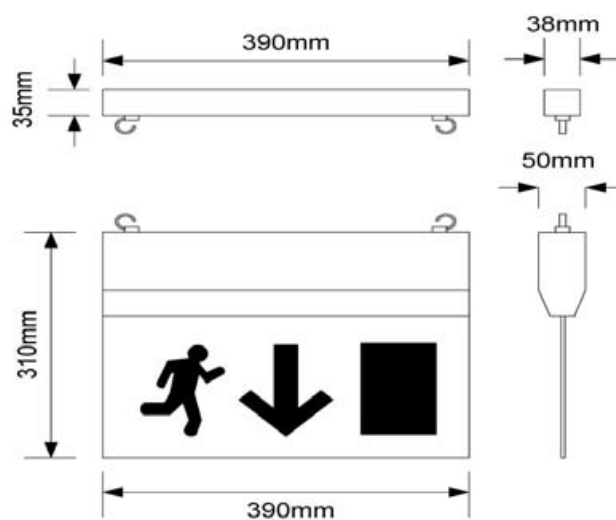

Add suffix to catalogue number:

PG: Polished gold. **PC:** Polished chrome. **SF:** Any other finish to BS or RAL.

AR: Arrow right legend. **AL:** Arrow left legend. **EM3ST:** Self test.

EM3AD: Addressable emergency. **EM3DA:** Dali addressable.

SL: Slave (270) lumens. **NM:** Non maintained. **HK:** Suspended on hooks.

CHN: Suspended on chains.

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.