



- Lumen package of between 2000 - 7000 lumens
- Mirage contemporary low profile column mounted, IP66, LED light source
- Better light output characteristics at only half the consumption with high efficient optic system directs the light exactly where it is needed
- Aesthetic appeal to complement today's architecture
- Can be wall mounted using (MWB) bracket kit
- Body and spigot in solid cast anodized aluminium IK10 construction guarantees durability & strength in all weather conditions
- No upward light spill, 0% ULOR
- Complies with EN60598
- Body can be powder coated to any RAL finish on request
- Universal mounting spigot, top or side entry with a diameter of 60 or 76mm
- The light head can be adjusted in the horizontal position-swing -15 ° to +15 °
- Single, twin, triple or quad mounting options
- Weight: 5kg
- Windage: 0.035m² (Projected area)
- Supplied with Cree, XTE or XPL 4000K option 3000K and 5500K colour temperature
- TA: Rated for -40°C to 55°C
- Power input 220 - 240V, 110 - 240V available as option
- Asymmetrical, long and narrow distribution, IESNA Type II and III, ME2, 3, 4, 5 and S classes
- Service life: long system lifetime (>100,000hrs)


Applications

- Landscaped areas, car parks, amenity areas, parks, highways, major roads



Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

We reserve all rights to make changes in materials and components used in its products. All data are subject to change without prior notice

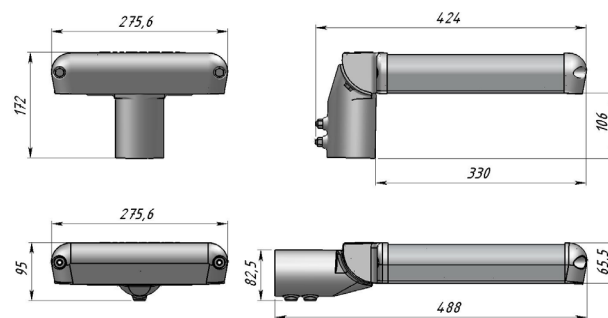

MIRAGE1XTE LED SPECIFICATION

CAT No	Total Luminous Output (lm)	Connected Load Total Watts (tcw)	Life (L80) (hrs)	Luminaire System Efficacy (lm/W)	Drive current
MIR16SE	1990	16	100,000	124.38	350
MIR22SE	2700	22	100,000	122.73	500
MIR29SE	3710	29	100,000	127.93	350
MIR42SE	4900	42	100,000	116.67	500
MIR60SE	7200	60	100,000	120.00	500

MIRAGE1XPL LED SPECIFICATION

MIR20SL	2900	20	100,000	145.00	500
MIR24SL	3400	24	100,000	141.67	600
MIR27SL	3900	27	100,000	144.44	700
MIR31SL	4350	31	100,000	140.32	800
MIR35SL	4750	35	100,000	135.71	900
MIR40SL	5150	40	100,000	128.75	1000



Add suffix to catalogue number:

PD: Power reduction (50%).

D: Dimming range from 1-100% (control signals 1-10V).

DD: Dali