




- Lumen package of between 7000 - 23000 lumens
- Mirage is a contemporary low profile column mounted, IP66, LED light source
- Better light output characteristics at only half the consumption with high efficient optic system directs the light exactly where it is needed
- Aesthetic appeal to complement today's architecture
- Can be wall mounted using (MWB) bracket kit
- Body and spigot in solid cast anodized aluminium IK10 constructions guarantees durability & strength in all weather conditions
- No upward light spill, 0% ULOR
- Complies with EN60598
- Body can be powder coated to any RAL finish on request
- Universal mounting spigot, top or side entry with a diameter of 60 or 76mm
- The light head can be adjusted in the horizontal position-swing -15 ° to +15 °
- Single, twin, triple or quad mounting options
- Weight: 7kg
- Windage: 0.035m² (Projected area)
- Supplied with Cree, XTE or XPL 4000K option 3000K and 5500K colour temperature
- TA: Rated for -40°C to 55°C
- Power input 220 - 240V, 110 - 240V available as option
- Asymmetrical, long and narrow distribution, IESNA Type II and III, ME2, 3, 4, 5 and S classes
- Service life: long system lifetime (>100,000hrs)

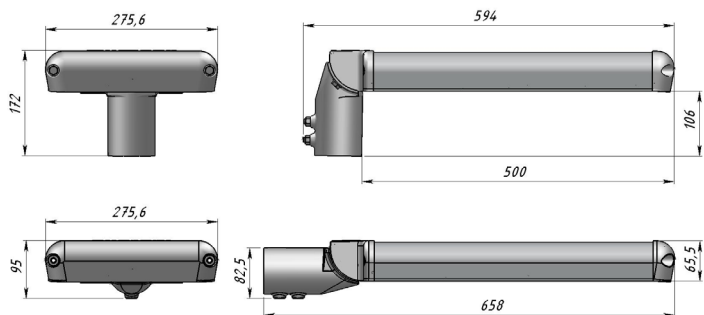

Applications

- Landscaped areas, car parks, amenity areas, parks, highways, major roads



Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

Add suffix to catalogue number:

PD: Power reduction (50%).

D: Dimming range from 1-100% (control signals 1-10V).

DD: Dali





MIRAGE2XTE LED SPECIFICATION

CAT No	Total Luminous Output (lm)	Connected Load Total Watts (tcw)	Life (L80) (hrs)	Luminaire System Efficacy (lm/W)	Drive current
MIR55E	7150	55	100,000	130.00	350
MIR79E	9450	79	100,000	119.62	500
MIR98E	11650	98	100,000	118.88	500
MIR116E	13850	116	100,000	119.40	500

MIRAGE2XPL LED SPECIFICATION

CAT No	Total Luminous Output (lm)	Connected Load Total Watts (tcw)	Life (L80) (hrs)	Luminaire System Efficacy (lm/W)	Drive current
MIR78L	11450	78	100,000	146.79	800
MIR89L	12750	89	100,000	143.26	900
MIR101L	13950	101	100,000	138.12	900
MIR117L	16600	117	100,000	141.88	800
MIR132L	18200	132	100,000	137.88	900
MIR148L	19700	148	100,000	133.11	1000
MIR175L	23050	175	100,000	131.71	950

