


- Recessed Opus LED luminaire
- Microprism diffuser for glare free illumination to EN12464-1 UGR<19
- Opal diffuser for uniform light transmission
- Powder coated white enclosed steel body,
- IP40 standard, IP44 available
- Provision for Gripple wire
- Fits most ceiling types, exposed t-bar 15 or 25mm
- Concealed grid, spring tee, SAS, metal pan and mdf using side support

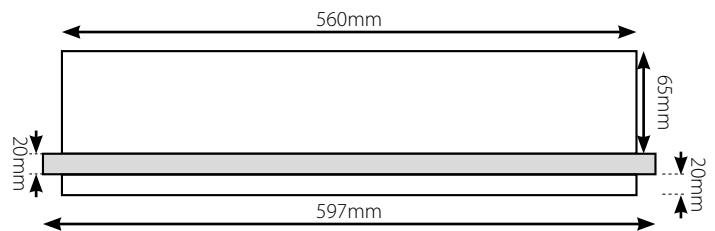

Options

- DALI dimmable
- 3 hour emergency version
- Self test, DALI Addressable emergency
- Conforms to EN60598-2-1 BS4533 CE

OPUS SPECIFICATION


CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L80) (hrs)	Total Delivered Lumens (lm)	Connected Load Total Watts (tcw)	Luminaire System Efficacy (lm/W)
OX2584	4000	80	60000	3310	28	118.21
OX3284	4000	80	60000	4050	35	115.71
OX5084	4000	80	60000	5590	49	114.08




Add suffix to catalogue number:

- CG:** Concealed grid. **ST:** Spring tee metal pan.
- E3:** Integral 3 hour emergency.
- ST3:** Self test emergency. **DE3:** DALI emergency.
- DD:** DAL. **MP:** Micro prism.

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

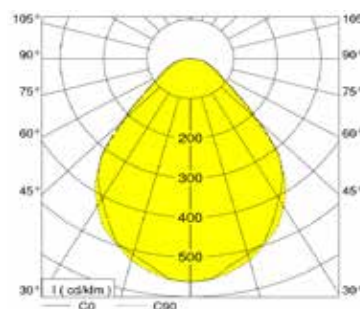

Micro prism diffuser

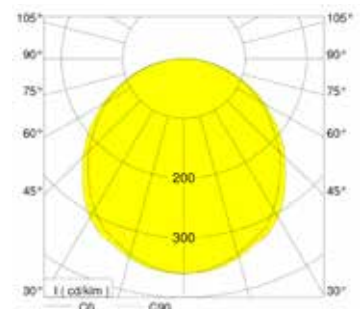

Opal diffuser