


- Recessed Opus LED luminaire
- Microprism diffuser for glare free illumination to EN12464-1 UGR<19
- Opal diffuser for uniform light transmission
- Powder coated white enclosed steel body
- IP40 standard, IP44 available
- Provision for gripple wire
- Fits most ceiling types, exposed T-bar 15 or 25mm
- Concealed grid, spring tee, SAS, metal pan and mdf using side support

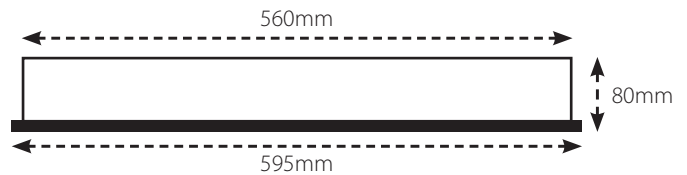

**Options**

- DALI dimmable
- 3 hour emergency version
- Self test, DALI addressable emergency
- Conforms to EN60598-2-1 BS4533 C€

**OPUSMP SPECIFICATION**


CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L80) (hrs)	Total Delivered Lumens (lm)	Connected Load Total Watts (tcw)	Luminaire System Efficacy (lm/W)
OMX2184	4000	80	60000	2730	21	130
OMX2684	4000	80	60000	3320	26	128
OMX2984	4000	80	60000	3570	29	123
OMR3284	4000	80	60000	3920	32	123
OMX3584	4000	80	60000	4220	35	121
OMX3884	4000	80	60000	4510	38	119
OMX4384	4000	80	60000	4980	43	116



**Add suffix to catalogue number:**

- CG:** Concealed grid. **ST:** Spring tee metal pan.
- E3:** Integral 3 hour emergency.
- ST3:** Self test emergency. **DE3:** DALI emergency.
- DD:** DALI.

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

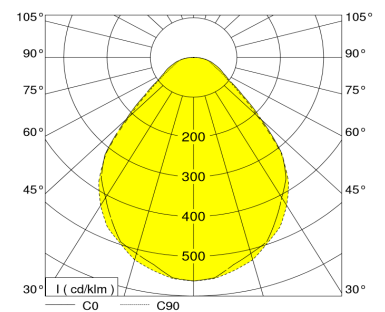

Micro prism diffuser