

- Semi-recessed Opus-SR luminaire giving an aesthetically styled solution
- High light output, balanced with good quality lit environment
- It eliminates dark ceilings which occur with downlight only schemes
- Powder coated white enclosed steel body,
- IP40 standard, IP44 available
- Provision for gripple wire
- An ideal modular for the high-tech interior schemes
- Fits most ceiling types, exposed T-bar 15 or 25mm
- Concealed grid, spring tee, SAS, metal pan, and mdf using side support arms

Options

- DALI dimmable
- 3 hour emergency version
- Self test, DALI addressable emergency
- Conforms to BS EN60598 C €



Add suffix to catalogue number:

CG: Concealed grid. **ST:** Spring tee metal pan.


E3: Integral 3 hour emergency.

ST3: Self test emergency. **DE3:** DALI emergency.

DD: DALI.

OPUSSR SPECIFICATION

CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L80) (hrs)	Total Delivered Lumens (lm)	Connected Load Total Watts (tcw)	Luminaire System Efficacy (lm/W)
OSRX2884	4000	80	60000	3220	28	115
OSRX2883	3000	80	60000	3100	28	110.71
OSRX3584	4000	80	60000	4000	35	114.29
OSRX3583	3000	80	60000	3890	35	111.14
OSRX4284	4000	80	60000	4700	42	111.9
OSRX4283	3000	80	60000	4600	42	109.52
OSRX5084	4000	80	60000	5500	50	110
OSRX5083	3000	80	60000	5410	50	108.2

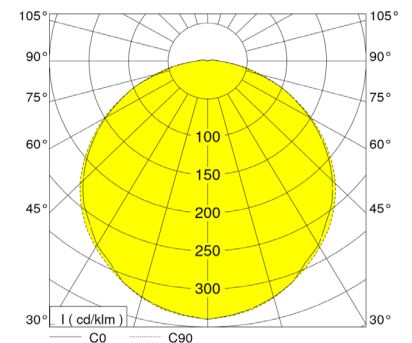

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.