




- Individual or continuous mounting
- Onyx truly unique architectural suspended led luminaire available as direct or direct/ indirect
- D: direct , DID :direct indirect
- Good glare control to EN12464 UGR>19
- 135 delivered lumens
- ECA and L2 compliant
- Direct/indirect lighting to soften the contrast on ceiling
- Body finish available in matt white, silver, black or any RAL colour
- Micro prism optic IP40
- Luminaires can be positioned above workstations
- Direct and indirect output can be controlled separately
- 2 colour temperatures 3000K and 4000K available for direct and indirect light
- Supplied with 3 meter suspension kit
- DSI, DALI, 3 hour integral emergency

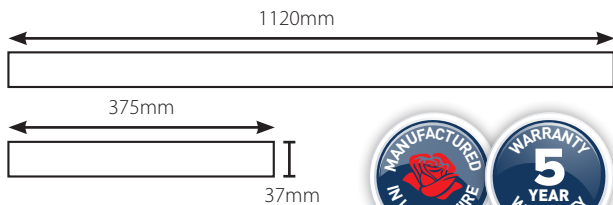

Add suffix to catalogue number:

EM3: 3 hour emergency. **EM3ST:** 3 hour self test emergency.

EM3DALI: DALI Addressable emergency.

SD: Dimming with push to make switch.

DALI: Digital Addressable Lighting Interface

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

ORIONLED SPECIFICATION

CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L80) (hrs)	Total Delivered Luminous Output (lm)	Total System Power (tcW)	Luminaire System Efficacy (lm/W)
OR20D	4000	80	60000	2700	20	135
OR34D	4000	80	60000	3400	26	131
OR31D	4000	80	60000	4000	31	129
OR37D	4000	80	60000	4600	37	124
OR44D	4000	80	60000	5300	44	120
OR52D	4000	80	60000	6300	52	121
OR24DID	4000	80	60000	3100	24	129
OR32DID	4000	80	60000	4000	32	125
OR42DID	4000	80	60000	5100	42	121
OR47DID	4000	80	60000	5690	47	121
OR57DID	4000	80	60000	6800	57	119
OR67DID	4000	80	60000	7900	67	118

