


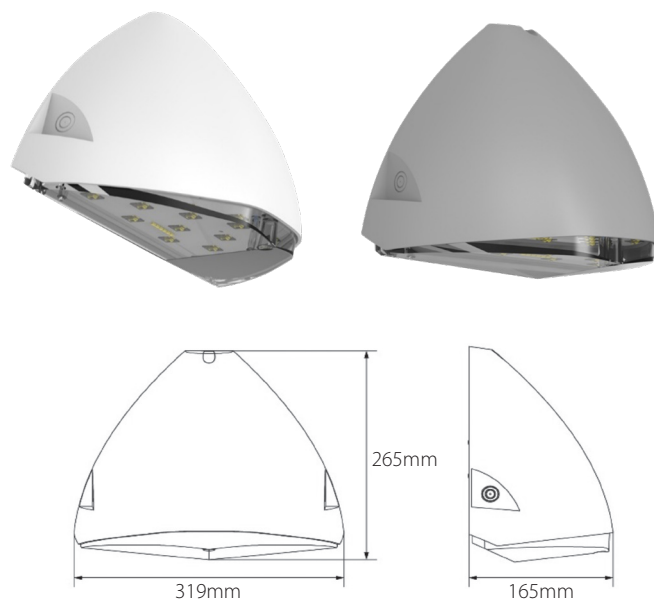

- OWL Wall mounted luminaire IP65
- Die-cast aluminium Body available in black RAL 9005, white RAL9010, silver RAL9006, and anthracite RAL7016
- Polycarbonate diffuser with UV stabilized polycarbonate diffuser
- Stainless steel screws, silicone gasket
- Protection class IP 65
- Dust-tight and protection against water jets
- Impact strength IK10
- Impacts < 20 joule
- Conduit and BESA box installation, rear and side cable entry

Options

- DALI, 3 hour integral emergency
- Integral microwave sensor
- LED colour temperature 3000K option
- Asymmetric light or open area light option
- Conforms to BS4533 EN60598 **CE**

OWL SPECIFICATION

CAT No	Colour Temp (K)	Colour Rendering (Ra)	Life (hrs)	Luminous Output (lm)	Connected load total watts (tcW)
OWL09	4000	80	60000	970	9
OWL12	4000	80	60000	1480	12
OWL15	4000	80	60000	1860	15
OWL18	4000	80	60000	2232	18
OWL21	4000	80	60000	2604	21

Add suffix to catalogue number:

DD: Dali DSI. **E3:** 3 hour emergency. **DE3:** Dali emergency.

3000K: 3k. **B:** Black, **W:** White, **A:** Anthracite, **S:** Silver.

MD: Microwave detector. **PC:** Photocell.

OA: Open Area Light Distribution. **AS:** Asymmetric Light Distribution.

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

