


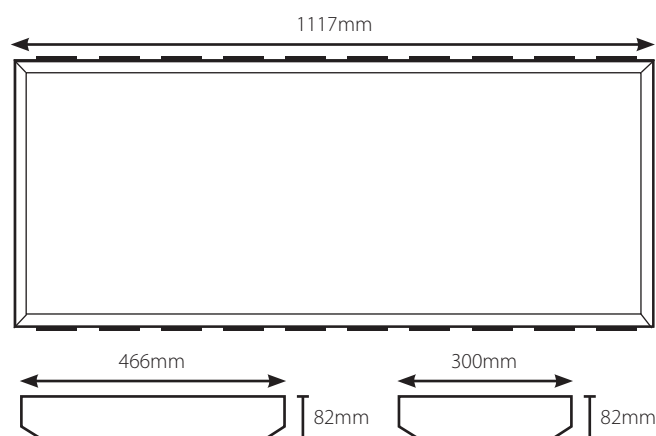

The Quo LED Luminaire for a wide variety of applications and mounting heights. Available with wide or narrow beam optic lens and a choice of lumen outputs and colour temperatures, ideal luminaire for industrial, commercial and other high and low bay applications.

Available with integral microwave sensor, 6 pin socket mounted on top of luminaire option supplied with 6 pin plug for ease of installation, plug and play.

- Mounting heights between 3m and 20m
- 5 year standard warranty - extended warranty available

Performance:

- Lumen package options 7000 to 28000
- Colour temperatures; 3000K, 4,000K or 5000K
- 80 CRI
- Long life-time: 60,000 hours
- High efficacy up to 120Lm/W
- 0-10V DSI and DALI driver
- Wire guard option
- Five year warranty
- Integral 3 hour emergency
- Option of mounting methods, including pendant, chain, toggle, hook and loop
- ECA and L2 compliant

Add suffix to catalogue number:

EM3: 3 hour emergency.

EM3ST: 3 hour self test emergency.

EM3DALI: DALI addressable emergency.

DALI: Digital Addressable Lighting Interface.

IM: Integral microwave sensor.



Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

QUOLED R3 SPECIFICATION

CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L80) (hrs)	Total Delivered Luminous Output (lm)	Connected Load Total Watts (tcw)	Luminaire System Efficacy (lm/W)
*QUO604	4000	80	60000	7300	60	122
*QUO764	4000	80	60000	9200	77	119
*QUO924	4000	80	60000	10990	93	118
*QUO1004	4000	80	60000	12700	110	115
*QUO1254	4000	80	60000	14300	125	114
QUO2404	4000	80	60000	14500	120	121
QUO1904	4000	80	60000	18400	156	118
QUO1904	4000	80	60000	21900	185	118
QUO2304	4000	80	60000	25490	220	116
QUO2404	4000	80	60000	28600	250	114

* 300mm version

