



- Tubular extrusion body
- Tridonic LED SLE module
- Integral driver, available as option
- DALI, 1-10v, phase, casambi
- Trailing leading edge dimming
- 12 watt 1200 lumeans
- Colour Temperature 2700K, 3000K, 4000K,
- Beam Angle 12°, 24°, 36°, >55°

Options

- Black, white, silver or any RAL and plated chrome & brass suspended / surface
- 4 beam angle options, choose of different front reflectors



Accessories

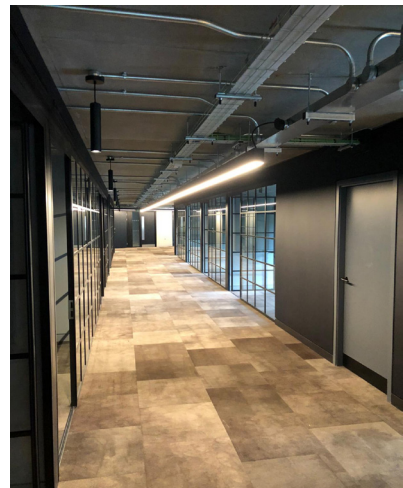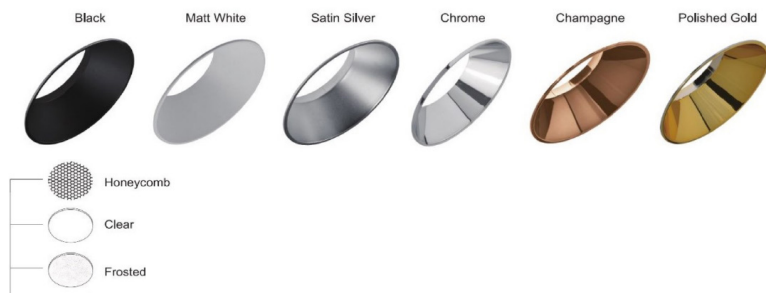

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.