



- Slot exit signs are suitable for incorporation into aesthetically pleasing interior environments
- Designed to be installed above doorways and low ceilings where there is limited ceiling height. Complying with the requirements of EN60598-2-22 and suitable for incorporation into an emergency lighting system complying with BS5266-1:2005
- Stainless steel finish as standard.
- Brass, polished chrome, satin chrome and any RAL finishes available to order complete with legend
- 8w 0rLEDlamp source

Surface Ceiling Mounted

Single or Double Sided


CAT No	Lamp
21002	LED

Wall Surface Mounted

CAT No	Lamp
21004	LED

Recessed

CAT No	Lamp
21006	LED

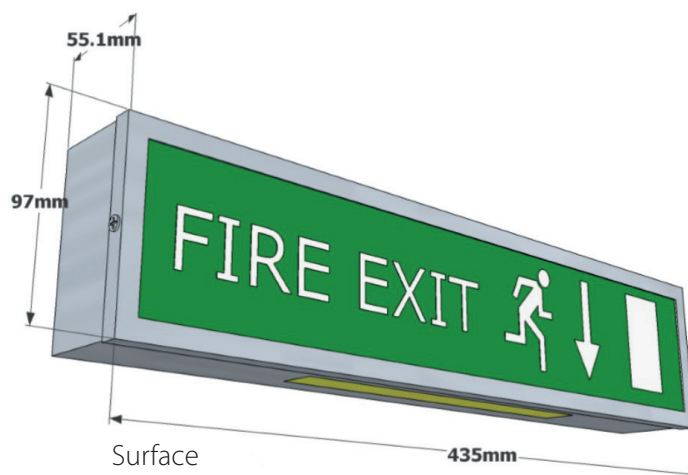

Add suffix to catalogue number:

B: Brass. **PC:** Polished chrome. **SC:** Satin chrome. **SF:** Any other finish to BS or RAL.

ULK: Universal stick on legend kit. **EM3ST:** Self test.

EM3AD: Addressable emergency. **EM3DA:** Dali addressable.

NM: Non maintained. **L:** Legend arrow left. **R:** Arrow right. **D:** Arrow down.

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.