

- Sunset LED ceiling recessed for 600x600 grid ceiling
- Microprism optic: illumination to current standard EN 12464-1 UGR<19 LG7, LG5, LG3
- Matt opal optic for enhanced light transmission and perfect uniform illuminations
- The balanced contrast creates a pleasant atmosphere, good quality lit environment
- It eliminates dark ceilings
- Fits exposed T-bar 15 or 25mm
- Housing fabricated from cold-rolled steel
- High-reflectance powder coated matt white fully recessed body with no protrusion below ceiling grid line
- Tridonic LED modules
- Tridonic LED driver
- ECA and L2 compliant

**Options**

- DALI, DSI dimmable
- 3 hour emergency
- Self test
- Turnable white LED module with 2,700 and 6,000 K
- Air handling version
- 3000K



**Add suffix to catalogue number:**

**DD:** DALI. **EM3:** Emergency version. **STE:** Self test emergency



**DE3:** DALI emergency. **MP:**Micro prism. **MO:** Matt opal.

**AH:** Air handling.


Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

**SUNSET SPECIFICATION**

CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L80) (hrs)	Total Delivered Lumens (lm)	Connected Load Total Watts (tcw)	Luminaire System Efficacy (lm/W)
SN2184	4000	80	60000	2490	21	119
SN2484	4000	80	60000	2770	24	115
SN3084	4000	80	60000	3390	30	113
SN3484	4000	80	60000	3710	34	109
SN3884*	4000	80	60000	3900	38	103

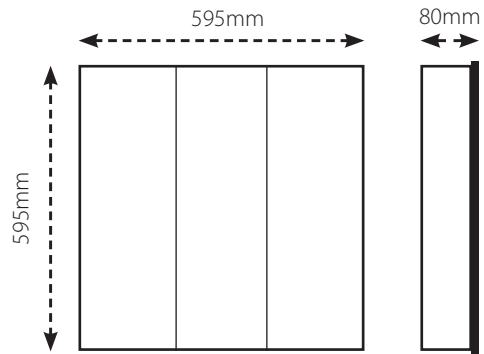

Micro prism



Opal