

- Twisters LED-soft-white PMMA sloping ribbed linear side panels give the luminaire a gentle side glow
- Centre optic panel clear linear or Matt opal. fully recessed body with no protrusion below Ceiling grid line
- Appealing angles glare-free lighting. The balanced contrast creates a pleasant atmosphere, illumination that complies with current standard
- LG7 high light output, balanced with good quality lit environment
- It eliminates dark ceilings.
- Fits most ceiling types, exposed T-bar 15 or 25mm
- Concealed grid, spring tee, SAS, burgess metal pan and MDF
- Side arms to be ordered separately
- Housing fabricated from cold-rolled steel
- High- reflectance powder coated matt white
- Conforms to *EN 12464-1 UGR<19 LG7:2015 - Microprismatic central optic for glare-free illumination
- Opal central optic for enhanced light transmission and perfect uniform illuminations
- Tridonic LED modules
- Tridonic LED driver

Options



- DSI dimmable
- DALI
- 3 hour emergency version
- Self emergency
- DALI addressable emergency
- Turnable White LED module with 2,700 and 6,500 K



Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

TWISTERLED SPECIFICATION

CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L80) (hrs)	Total Delivered Lumens (lm)	Connected Load Total Watts (tcw)	Luminaire System Efficacy (lm/W)
TWX2484*	4000	80	60000	2850	24	118.75
TWX3184*	4000	80	60000	3670	32	114.69
TWX4884	4000	80	60000	5396	46	117.30
TWX2484*	3000	80	60000	2740	24	114.17
TWX3184*	3000	80	60000	3590	32	112.19
TWX4884	3000	80	60000	5100	46	110.87

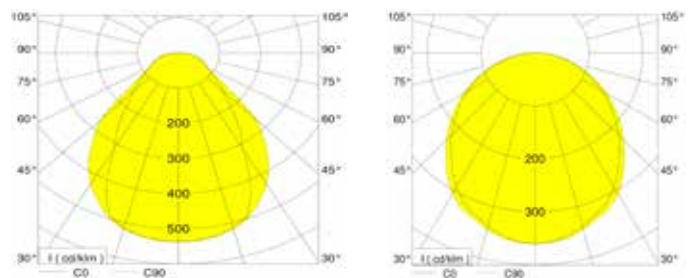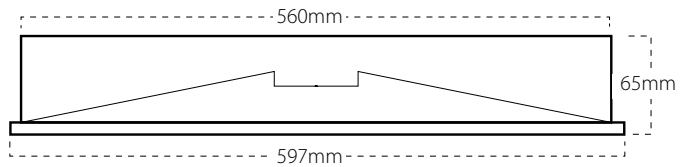

Micro prism optic

Opal optic

Add suffix to catalogue number:

- HFD:** dimmable. **HFDD:** DALI. **EM3:** emergency version
- STE:** Self test emergency. **DE3:** DALI emergency.
- CG:** Concealed grid. **ST:** Spring tee.
- SAS:** Burgess metal pan. **CL:** Clear prism linear optic.
- MO:** Matt opal optic.