

- Twisters LED-soft **lite** sloping side panels give the **Luminaire** a gentle side glow
- Centre **Micro prism** optic panel, fully recessed body with no protrusion below ceiling grid line
- Appealing angles glare-free lighting. The balanced contrast creates a pleasant atmosphere, illumination that complies with current standard
- LG7 high light output, balanced with good quality lit environment
- It eliminates dark ceilings
- Fits most ceiling types, exposed T-bar 15 or 25mm
- Concealed grid, spring tee, SAS, burgess metal pan and MDF
- Side arms to be ordered separately
- Housing fabricated from cold-rolled steel
- High-reflectance powder coated matt white
- Conforms to *EN 12464-1 UGR<19 LG7:2015 - Microprismatic central optic for glare-free illumination
- Tridonic LED modules
- Tridonic LED driver
- ECA and L2 compliant

Options



- DSI dimmable
- DALI
- **Casambi**
- 3 hour emergency version
- Self emergency
- DALI **Casambi** addressable emergency
- Tunable White LED module with 2,700 and 6,500 K
- **CRI 90**



Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

TWISTERLED SPECIFICATION

CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L80) (hrs)	Total Delivered Lumens (lm)	Connected Load Total Watts (tcw)	Luminaire System Efficacy (lm/W)
TWX2184*	4000	80	100000	2750	21	131
TWX2484*	4000	80	100000	3120	24	130
TWX3084*	4000	80	100000	3900	30	130
TWX3484*	4000	80	100000	4420	34	130
TWX3884	4000	80	100000	4788	38	126
TWX2183*	3000	80	100000	2530	21	119
TWX2483*	3000	80	100000	2870	24	119
TWX3083*	3000	80	100000	3588	30	119
TWX3483*	3000	80	100000	4066	34	119
TWX3883	3000	80	100000	4404	38	115

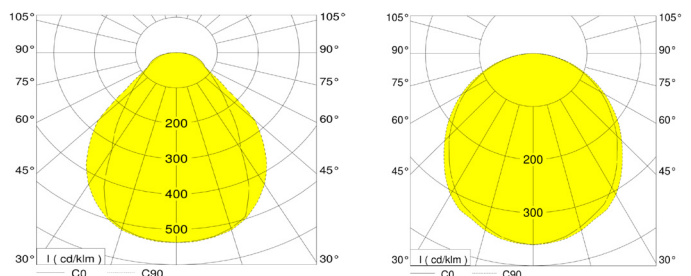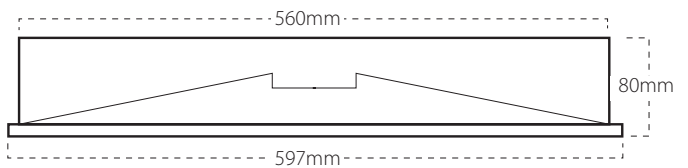

Micro prism optic

Opal optic

Add suffix to catalogue number:

HFD: dimmable. **HFDD** DALI. **EM3:** emergency version **STE:** Self test emergency. **DE3:** DALI emergency. **CG:** Concealed grid. **ST:** Spring tee. **SAS:** Burgess metal pan **CS:** Casambi, **CSE3:** Casambi Addressable Emergency