




- Recessed LED downlight IP54
- Tridonic **CLE** led 60000h L80
- **Aluminum** body
- Supplied with **Fixed out put** Tridonic LED driver
- Bezel available in white RAL9016, RAL7016 anthracite, RAL9006 **Grey**, RAL9005 black

- CRI80 4000K
- CRI90 3000K
- CRI90 2700K

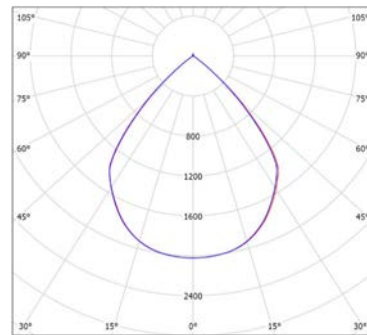

Options

- DALI,3 hour emergency
- Push to dim, **Casambi**
- Trailing, leading edge dimming
- Phase cut dim
- 5 year warranty
- Conforms to BS4533 EN60598 **CE**



Add suffix to catalogue number:

DD: Dali DSI. **CS**: Casambi **E3**: 3 hour emergency. **ST3**: Self test emergency.

DE3: Dali emergency. **BK**: Black, **W**: White bezel. **A**: Anthracite. **G**: Grey 4K, 3K or 27K Kelvin

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

X44IP54LED

SPECIFICATION

REF	Watts	Lumens	Bezel mm	Height mm	Cut out mm
X4428	25	2990	230	62	185-220
X4425	23	2670	230	62	185-220
X4420	18	2140	190	55	160-180
X4415	13	1590	165	55	130-150
X4412	11	1290	145	50	125-135
X4410	9	1090	110	50	80-100

