




- Choice of reflectors
- Glare control
- Black, Gold, Copper or any RAL color



- Fire rated IP65 LED downlight
- Tested to fire rating of FR90 and is IP65 compliant
- Direct replacement for 50w
- Supplied with fixed output driver
- Weight .4kg
- Mains voltage 220 - 240V
- Mains frequency 50 / 60 Hz
- Operating ambient temperature: -25°C to +30°C
- Can be connected to 220 DC central battery
- Die cast aluminium passive thermal cooling management housing
- Facetted highly-reflective zero iridescence aluminium reflector
- White bezel as standard, available with brushed chrome, black or any RAL colour
- CRI 80, 3000K warm white or 4000K daylight
- Dimming options, DALI, DSI switch DIM, 1-10v, trailing and leading edge
- 3 hour emergency versions
- Conforms to EN60 598-2-2 BS4533 C €

**XF8 DOWNLIGHT SPECIFICATION**

CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L70) (hrs)	Total luminous Output (lm)	Connected Load Total Watts (tcw)	Luminaire System Efficacy (lm/W)
XF82 883	3000	90	50000	650	8	81.85
XF82 884	4000	90	50000	670	8	83.75

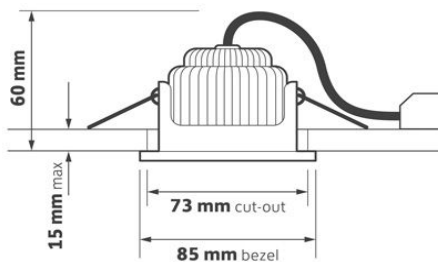

**Add suffix to catalogue number:**

- EM3:** 3 hour emergency. **EMST:** 3 hour self test emergency.
- EM3DALI:** DALI Addressable emergency.
- SD:** Dimming with push to make switch.
- DALI:** Digital Addressable Lighting Interface.
- TLE:** Trailing- leading 1-10V. **W:** White bezel.
- BC:** Brushed chrome bezel. **SP:** Any RAL colour please specify.

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

