

- A slim circular injection moulded LED luminaire for ceiling and wall
- TPA rated diffuser
- Suitable for defined escape routes
- Semi recessed version using semi recessed kit, cut out 400mm
- Can be suspended with wire suspension kit
- Available with 3W night light
- 5 year warranty
- Choice of back lit halo, clear, blue, green and red

Available with integral PIR or microwave detector. The PIR switch will switch on the connected load automatically when an area is occupied, and then switch it off automatically when the area has been vacant for a chosen duration.

Microwave detector will automatically switch on the luminaire when area is occupied, when area is vacant luminaire will dim down to set level or switch off. Luminaire will not switch on if there is adequate ambient light.

Options


- DSI dimmable control gear
- DALI
- 3 hour emergency version
- Self test emergency
- DALI emergency

Applications





- Corridors / staircases
- Circulation areas
- Toilets
- Student accommodation bedrooms
- Workshops
- Hotel

ZEROLED SPECIFICATION

CAT No	Colour Temp (K)	Colour Rendering (RA)	Life (L80) (hrs)	Total Delivered Lumens (lm)	Connected Load Total Watts (tcw)	Luminaire System Efficacy (lm/W)
ZMX1683	3000	80	50000	1630	16	102
ZMX2183	3000	80	50000	2130	21	110
ZMX1684	4000	80	50000	1750	16	122
ZMX2184	4000	80	50000	2590	21	123

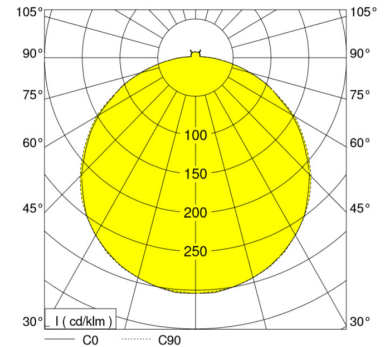

Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

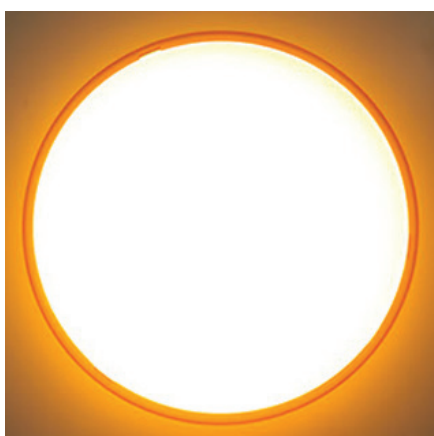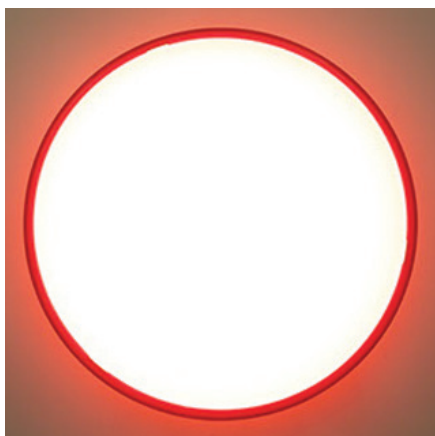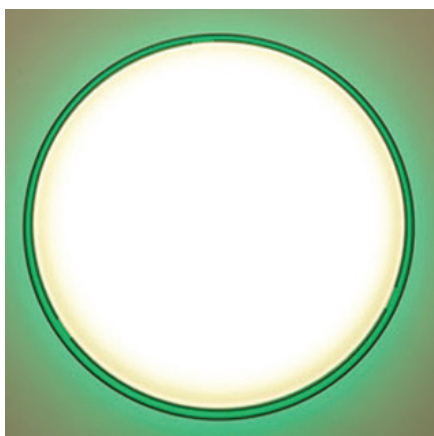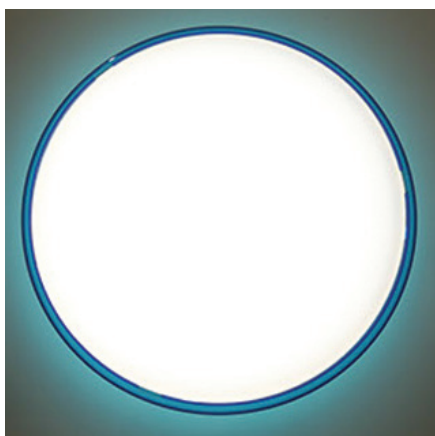

Add suffix to catalogue number:

EM3: 3 hour emergency. **EM3ST:** 3 hour self test emergency. **EM3DALI:** DALI Addressable emergency. **DSI:** Switch DIM dimming with push to make switch. **DALI:** Digital Addressable Lighting Interface. **P:** PIR. **MW:** Microwave. **SR:** Semi-recessed kit. **NL:** Night Light.